


TECHNICAL DATA SHEET

DAB12-110EV

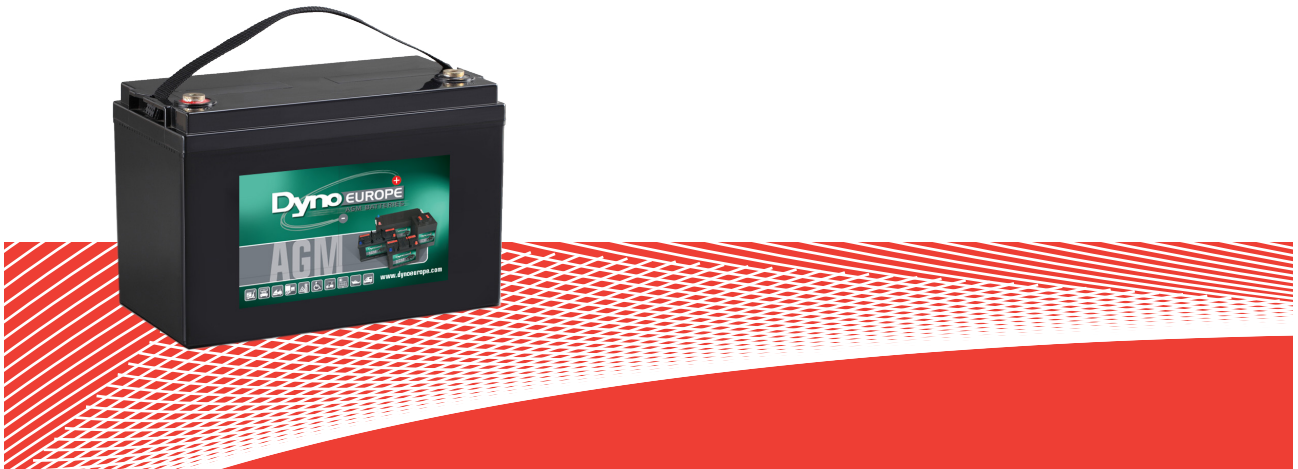

Applications

- > Electric vehicle
- > Electric wheelchair
- > Electric scooter
- > Electric play car for children
- > Garbage truck
- > Patrol car

General Features


- > High Corrosion Resistant Performance: Pb-Ca multi-alloy grid
- > High Energy Density and Power Density
- > Excellent Charge Acceptance Ability
- > Strong High and Low Temperature Performance
- > Optimized Capability of instant High-current Discharging
- > Low self-discharge rate

Specification

Nominal Voltage	12V
Nominal Capacity	129.8Ah
Design life	5 years
Terminal	M8
Approx. Weight	Approx 33.5kg (73.9lbs)
Container Material	ABS
	129.8Ah 20Hour Rate (6.49 A to 10.5V)
Rated Capacity	122Ah 10Hour Rate (12.2 A to 10.5V)
	115.5Ah 5Hour Rate (23.1 A to 10.5V)
Operating Temperature	Discharge: -20 ~50°C (-4~ 122°F) Charge: -20 ~50°C (-4~ 122°F) Storage: -20 ~50°C (-4~ 122°F)
Charge current:	Max. 21.0 .0 A
Charge Method (25 °C)	Float Charge: 13.7 -13.9 V, recom. 13.8 V (-18mV/ °C) Cycle charge: 14.28 -14.4 V, recom. 14.4 V (-30mV/ °C)
Self discharge	3% of capacity declined per month at 25°C



Dimension: 330(L)×172(W)×214(H)×214(TH) Unit: mm

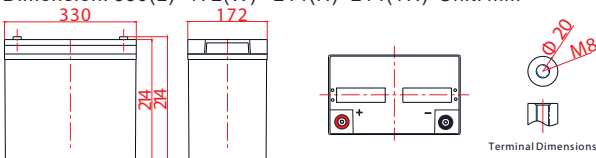

TECHNICAL DATA SHEET

DAB12-110EV

Constant Current Discharge Characteristics Unit: A (25°C, 77°F)

F.V/Time	5Min	15Min	30Min	1h	2h	3h	5h	8h	10h	20h
1.60V	446	240	146	85.3	48.9	36.2	23.8	15.3	12.5	6.58
1.65V	433	232	143	84.8	48.6	35.9	23.6	15.1	12.4	6.55
1.70V	415	227	141	84.1	48.3	35.3	23.3	15.0	12.3	6.51
1.75V	382	220	140	82.9	47.5	35.0	23.1	14.9	12.2	6.49
1.80V	342	205	134	80.8	46.7	34.7	22.5	14.8	12.1	6.45
1.85V	305	183	122	74.8	44.3	32.7	21.3	14.2	11.7	6.34

Constant Power Discharge Characteristics Unit: W/cell(25°C, 77°F)

F.V/Time	5Min	15Min	30Min	1h	2h	3h	5h	8h	10h	20h
1.60V	748	422	264	161	92.5	68.9	45.2	29.7	24.1	13.0
1.65V	720	415	261	160	92.2	68.0	44.9	29.4	23.9	13.0
1.70V	716	410	261	159	91.8	67.7	44.6	29.3	23.6	12.9
1.75V	668	407	260	157	91.3	67.3	44.3	29.1	23.4	12.8
1.80V	613	385	254	156	91.1	67.0	43.8	28.8	23.2	12.8
1.85V	547	344	233	145	87.0	63.7	41.8	27.8	22.8	12.7

Disclaimer: Manufacturers have the right to self-modify the parameters of the product updates, please keep in touch with manufacturers to obtain the latest information.

Charger recommendations


Type of charger	Zivan	AQHF WP	AQHF24-30FC G2
Matching profile	AGM =BA1+CU2	AMG SLA	AGM

Max. charging current 2.4Vpc


TECHNICAL DATA SHEET

DAB12-110EV


Discharge characteristic

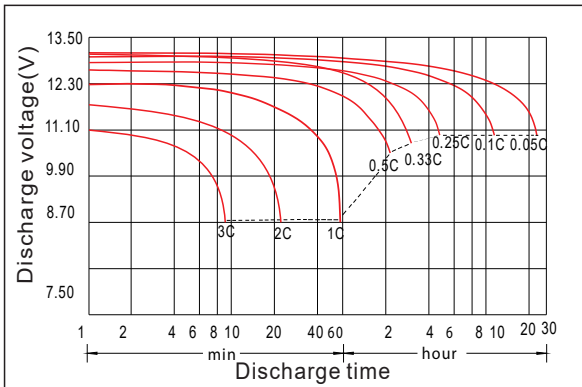


Charging characteristic

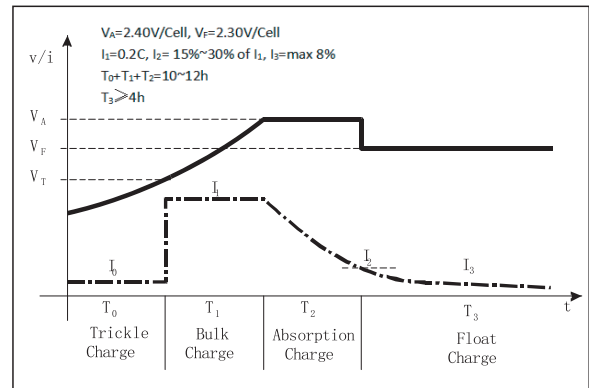


The effect of temperature on capacity

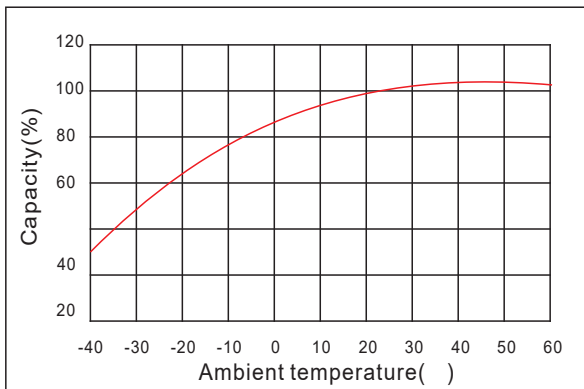

The effect of discharge depth on cycle life

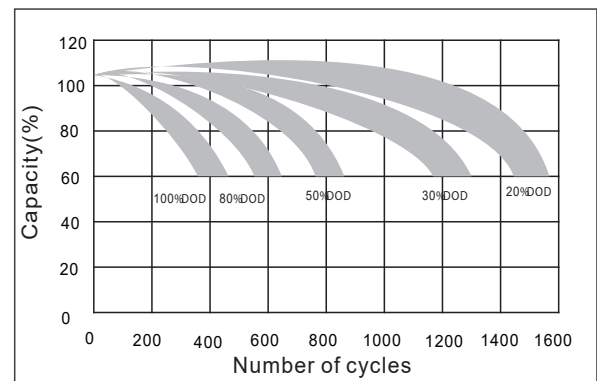

Curves of self-discharge

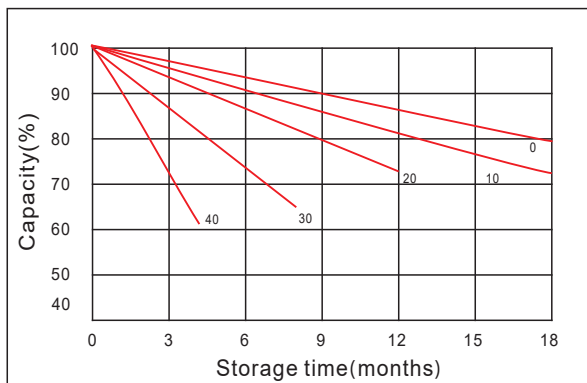

Curves of open circuit voltage vs. capacity

